STANDARD SEPARATOR EQUIPMENT

- 1. 150 lb. R.F. FLANGE
- 2. ISOLATION SPOOL PIECE WITH INSULATION KIT
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. CORRUGATED PLATES
- 10. OIL / WATER SEPARATOR CHAMBER
- 11. SACRIFICAL ANODES
- 12. OUTLET DOWNCOMER
- 13. MANWAY W/ BOLT-ON EXTENSION
- 14. NPT W/ NYLON BUSHING (FITTING FOR OIL PUMP OUT PIPE) W/ RISER PIPE
- 15. NPT W/ NYLON BUSHING (FITTING FOR LEVEL SENSOR) W/ RISER PIPE
- 16. P.P.2 PROTECTION PROVER
- 17. NPT W/ NYLON BUSHING (FITTING FOR VENT)
- 18. NPT W/ NYLON BUSHING (FITTING FOR GAUGE W/ PLUG)
- 19. SECONDARY COALESCER
- 20. LIFTING LUG


NOTES:


SURFACE PREP: S.S.P.C. 6 BLAST EXTERIOR SURFACES, S.S.P.C. NO. 10 BLAST INTERIOR SURFACES.

EXTERIOR COATING: CORROCOTE PLUS -15 MILS - SHELL, 15 MILS - HEADS INTERIOR COATING: MATERIAL: CORROCOTE PW THICKNESS: 10-15 MILS

OTHER OPTIONS AVAILABLE

- ☐ FIBERTHANE EXTERIOR COATING (IN LIEU OF CORROCOTE).
- UPGRADE TO TYPE I DOUBLE WALL TANK.
- ☐ 15 PPM PERFORMANCE (IN LIEU OF 10 PPM).
- ☐ INTERCEPTOR COMPARTMENT.
- ☐ HOLD DOWN STRAPS

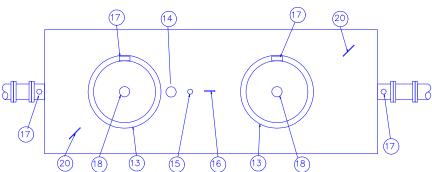

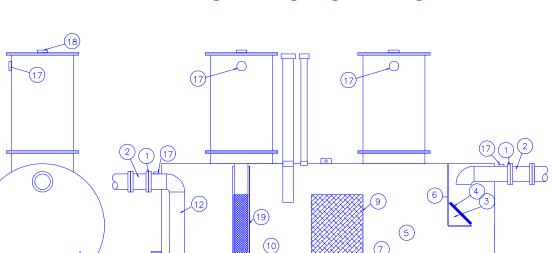

AREO-POWER UNITIZED FUELER, INC.

103 SMITHTOWN BLVD SMITHTOWN, NY 11787

DRAWING TITLE

AREO-POWER

TYPICAL UNDERGROUND OIL-WATER SEPARATOR



ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION OF AREO-POWER UNITIZED FUELER, INC.

DWG NO: OWS-CYL	
SCALE: NTS	DWN BY: HT
SHEET: 1 OF 1	DATE: 2/10/98